


X-SLIM-LINE

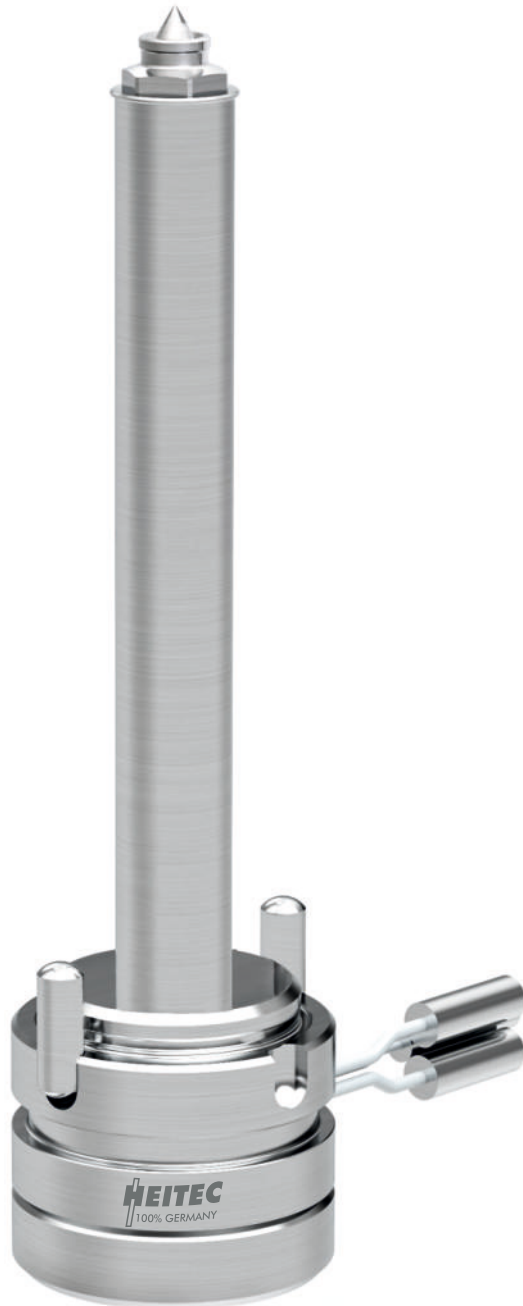

✓ EFFIZIENZ +

HEITEC
HEISSKANALTECHNIK


X-SLIM-LINE

Type 01.059.



PRODUCT FEATURES

- Installation diameter: 11 / 13 / 20mm
- Nozzle lengths: 100 - 350mm
- Melt channel diameter: 4,5 / 6 / 8mm
- Available gate types: Type 11 / 12 / 13
- Replacement of tips, heaters and temperature sensors can be performed by customer
- 230V, external heating
- Nozzle with large melt channel and at the same time small outer dimensions
- Excellent suitability for the injection moulding of packaging products, closures and other consumer goods with the additional challenge of narrow installation spaces
- Short cycle times thanks to low heat input into the mould
- Quick colour changes thanks to smaller gate well area
- Suitable for all types of commodity resins with up to 30% filler content
- Efficient use of energy and resources
- Can be integrated into HOT HALVES and FLEX-IN systems

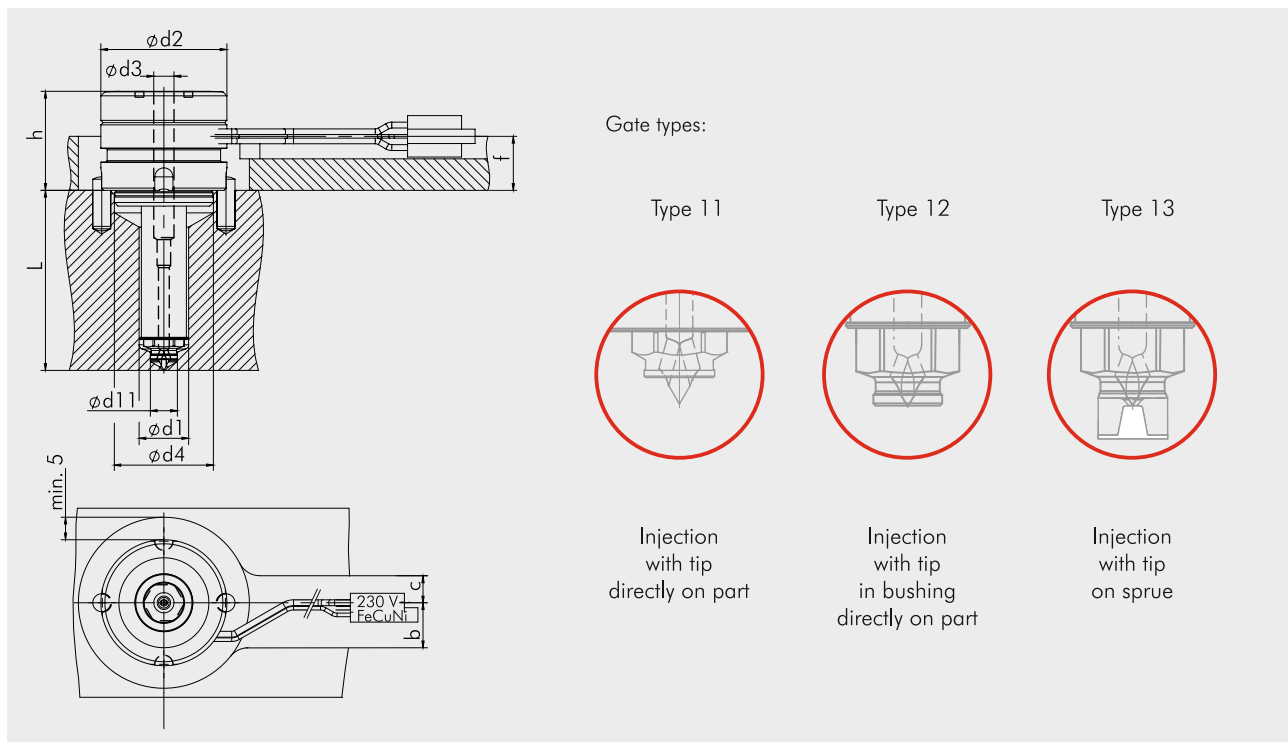

Type	d2	d1	d3	d4	d11	L	h	f	b	c	tip
01.059.11	28	11	4,5	22	6	80-350	22	12	10	6	11-23
01.059.13	32	13	6	22	7	80-350	22	12	10	6	11-23
01.059.20	32	20	8	26	12	80-350	22	12	20	6	11-23

